


INSTALLATION MANUAL




TOOLS REQUIRED

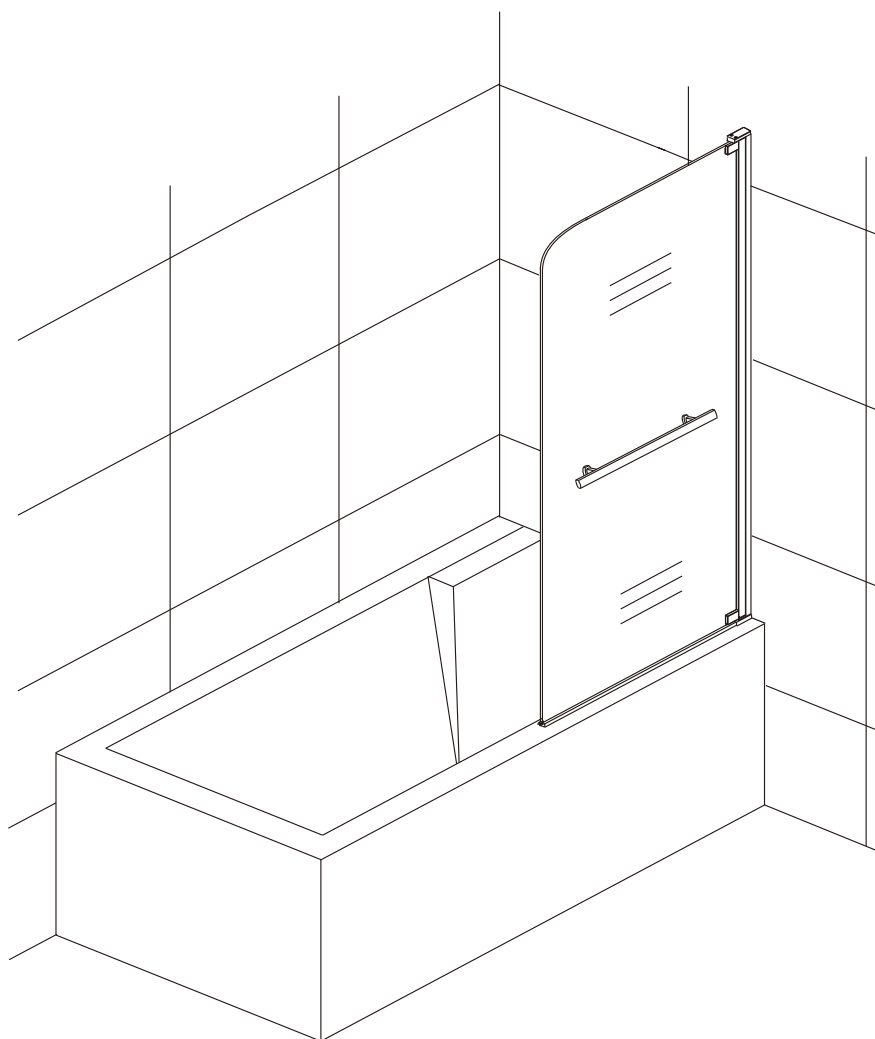


PENCIL




($\varnothing 6$ $\varnothing 3.2$) DRILL BIT



SILICONE & GUN




FLAT HEAD & CROSS
HEAD SCREWDRIVER



TAPE MEASURE



SPIRIT LEVEL



DRILL




RUBBER HAMMER


PACKING LIST

 A B-439-H X1	 B B-437-H X1	 C B-436-H X1	 D C2-007 X1	 E C3-016 X1
 F E1-247 X1	 G E1-275 X1	 H I-529 L/R X2	 I I-498 X1	 J I-499 X1
 K I-533 X1	 L H-056 L/R X2	 M I-598 L/R X2	 N I-432 X3	 O ST4*40 X3
 P ST3.5*20 X4	 Q ST4*30 X4	 R E1-289 X1	 S E-028 X1	 T I-1136 X1


PRODUCT SCHEMATIC DIAGRAM

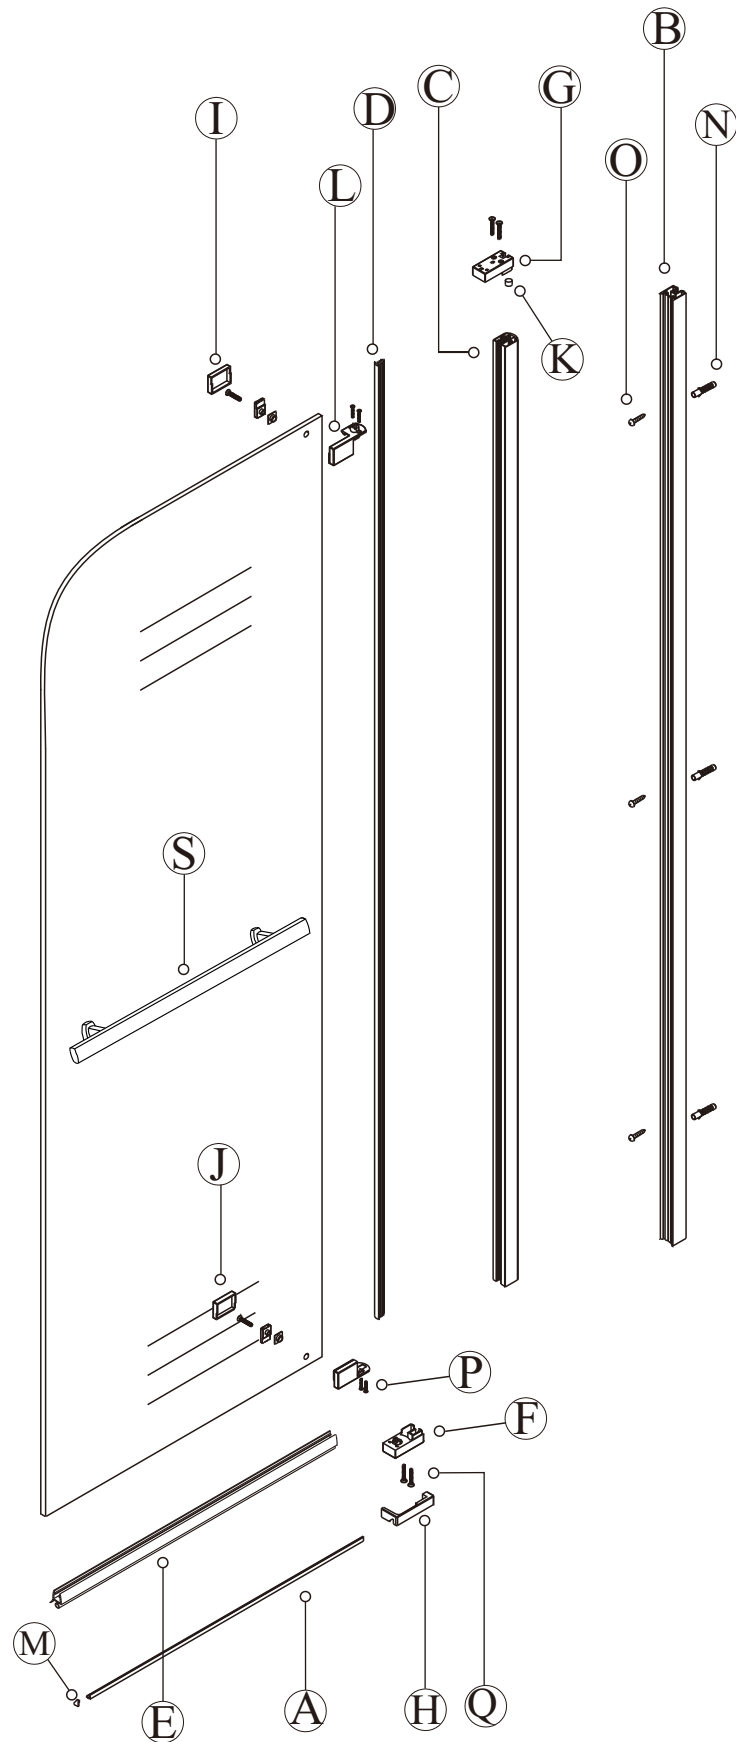

1

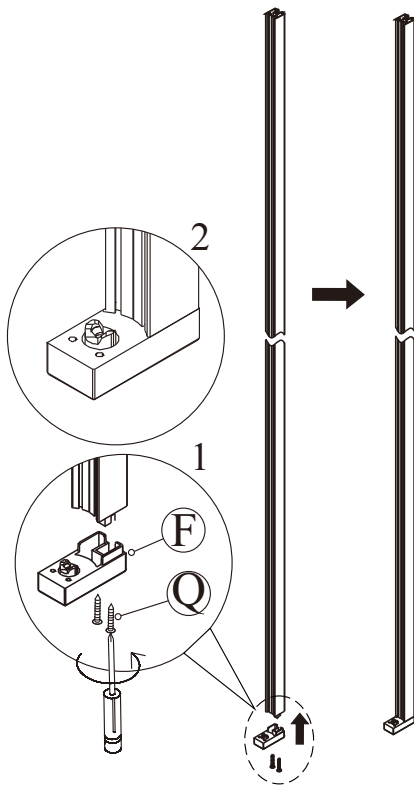


2

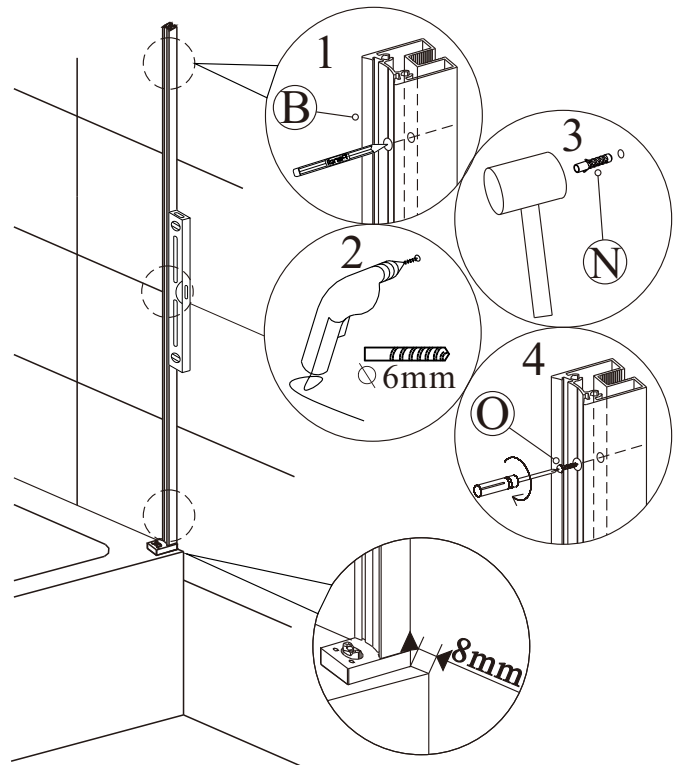


8 mm gap from the edge of wall profile to the outside edge of the tray, which make sure enough room for fitting the water retaining cover


3

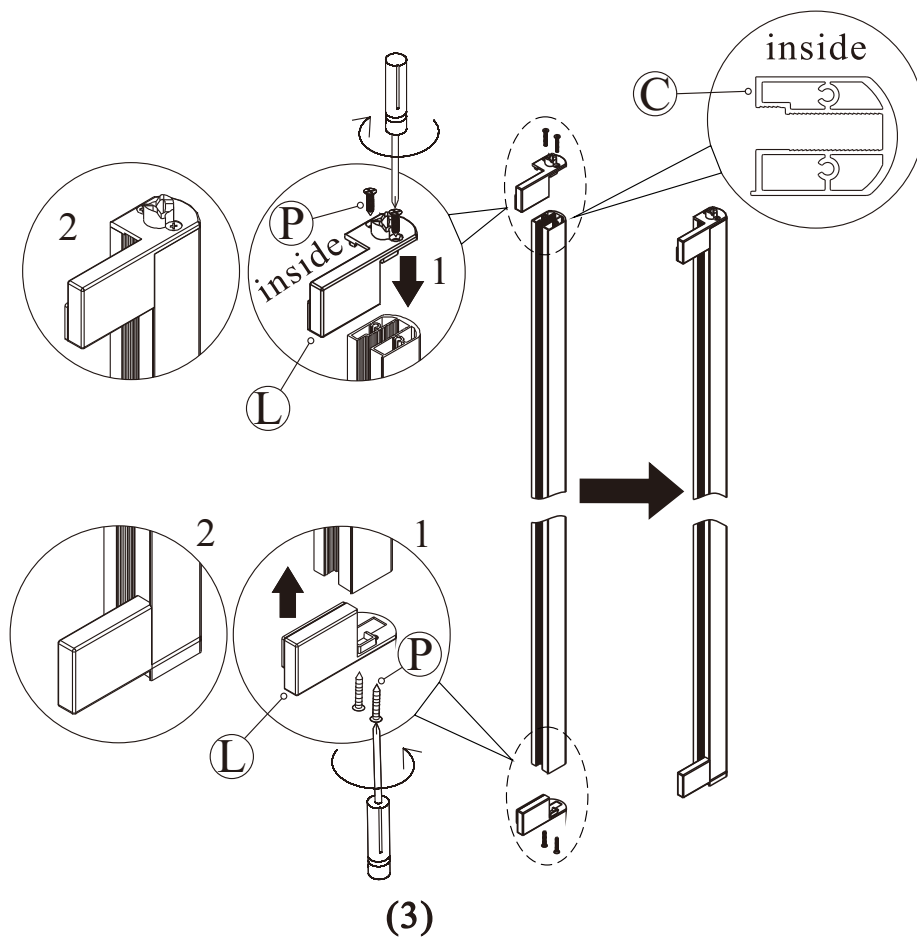

4

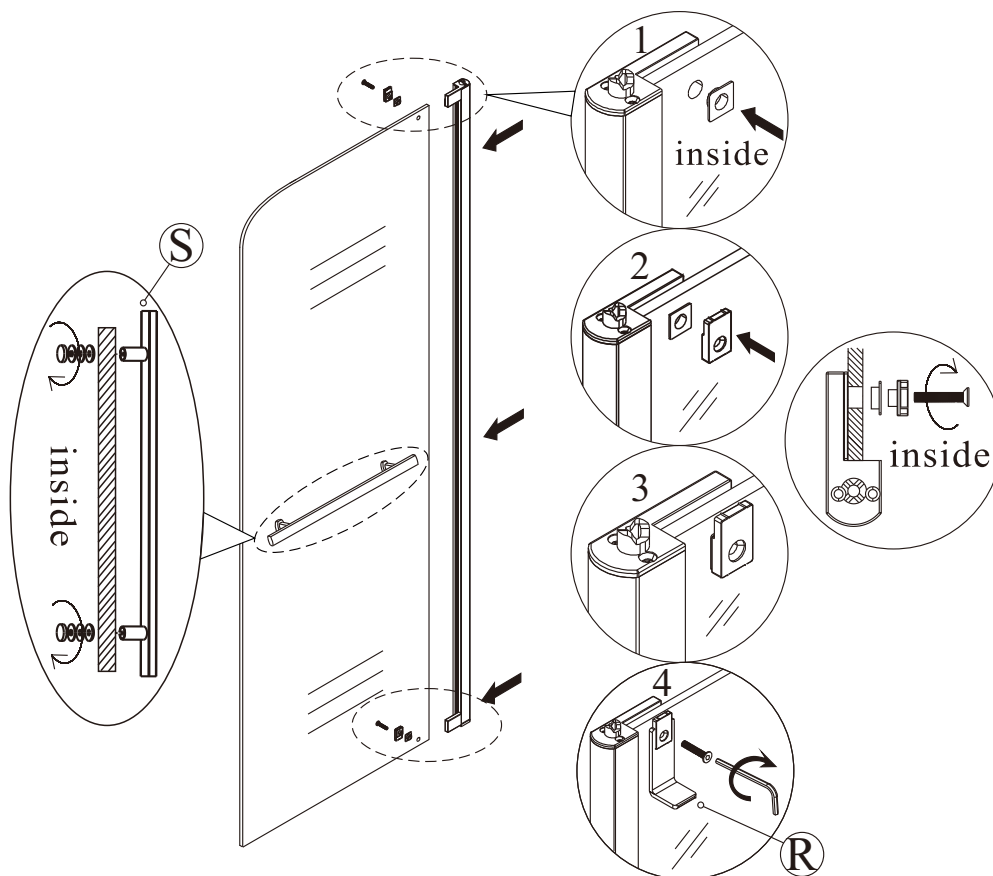


5

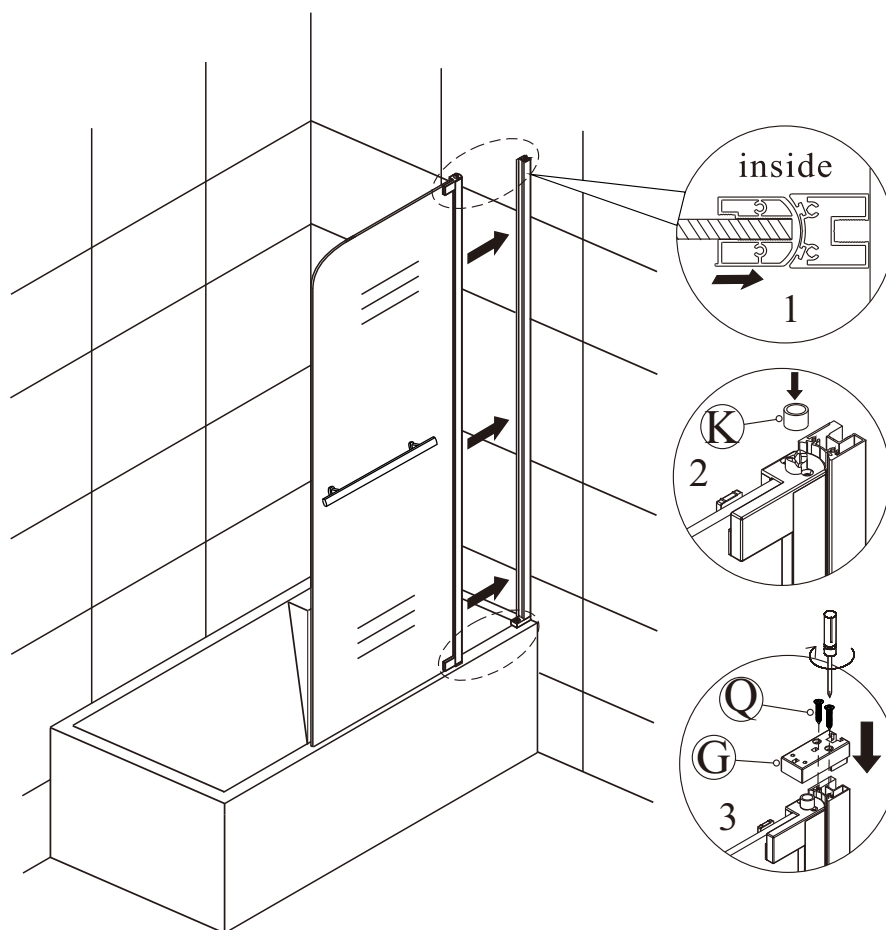


(4)

6

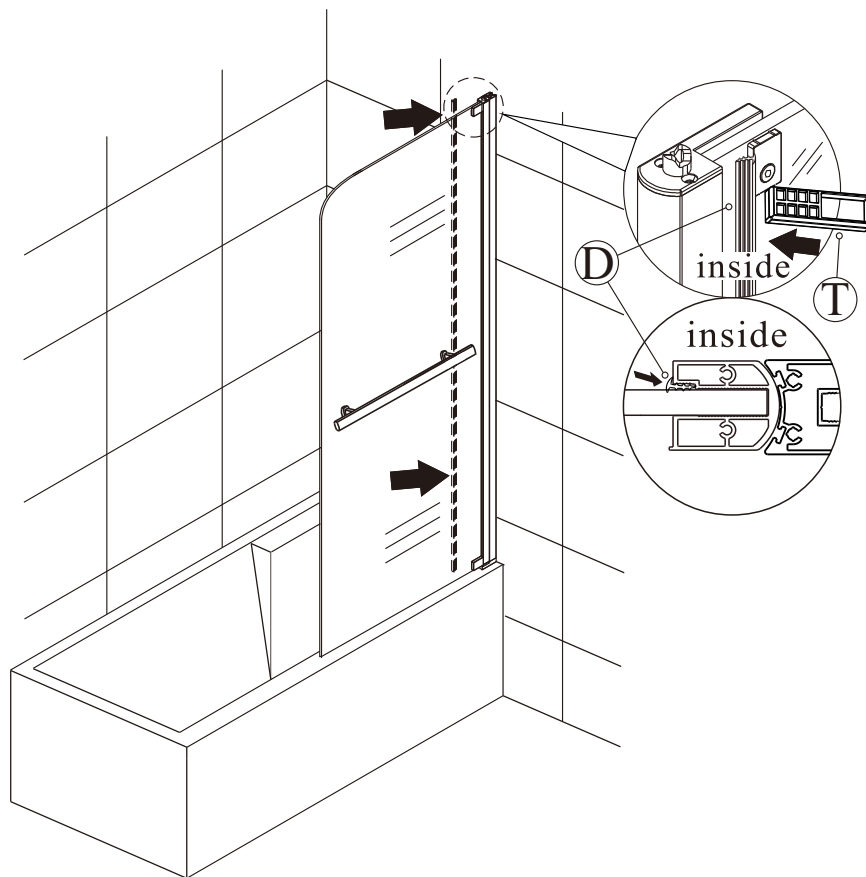


7

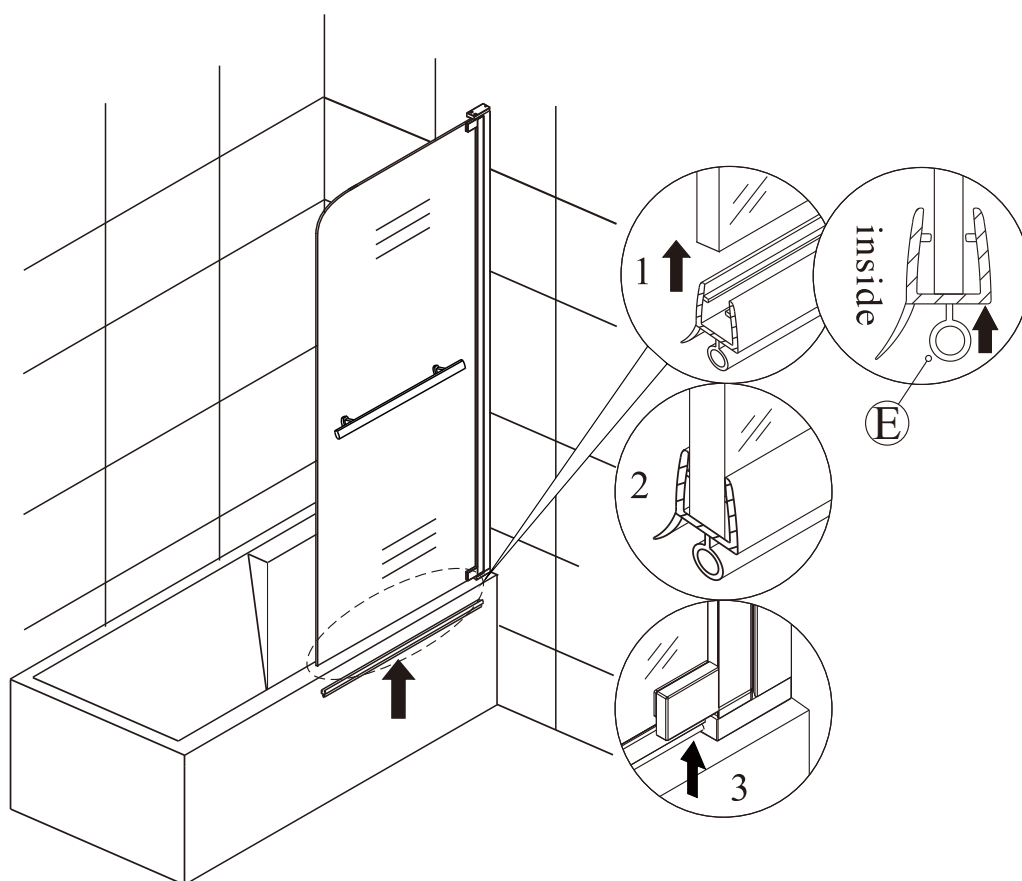


(5)


8

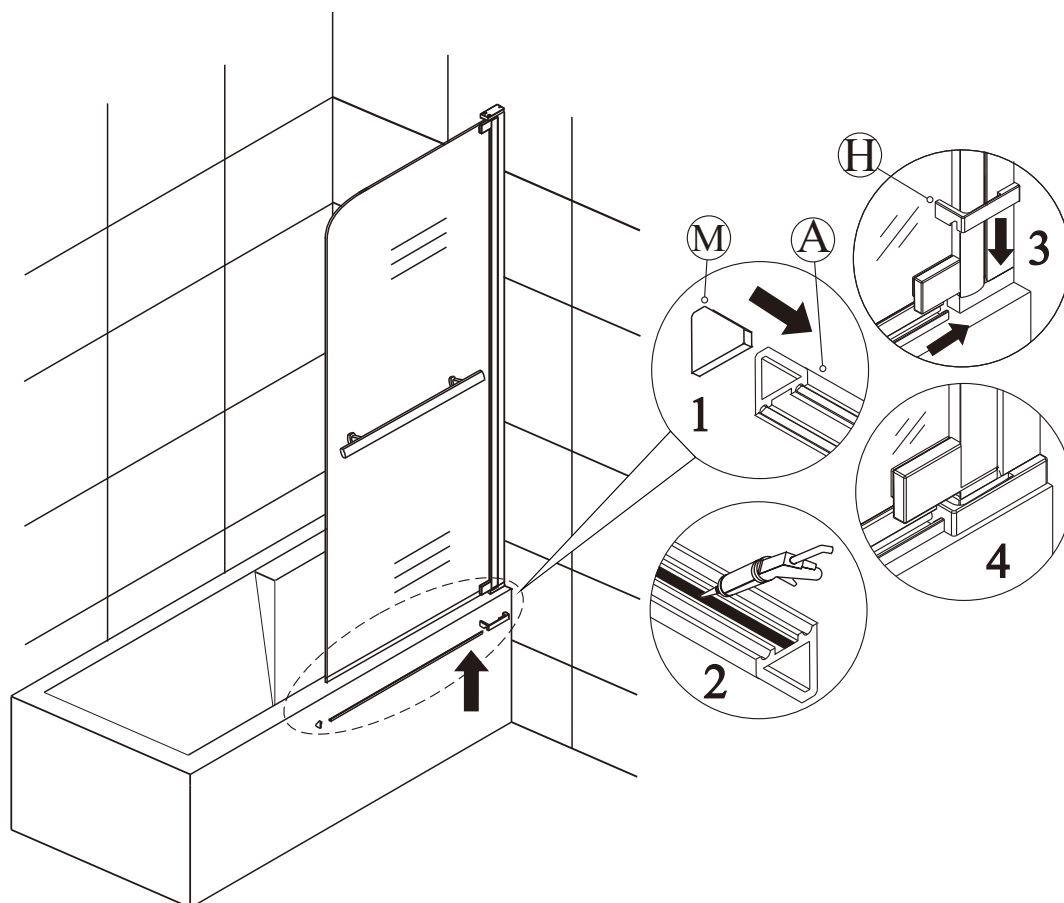

9

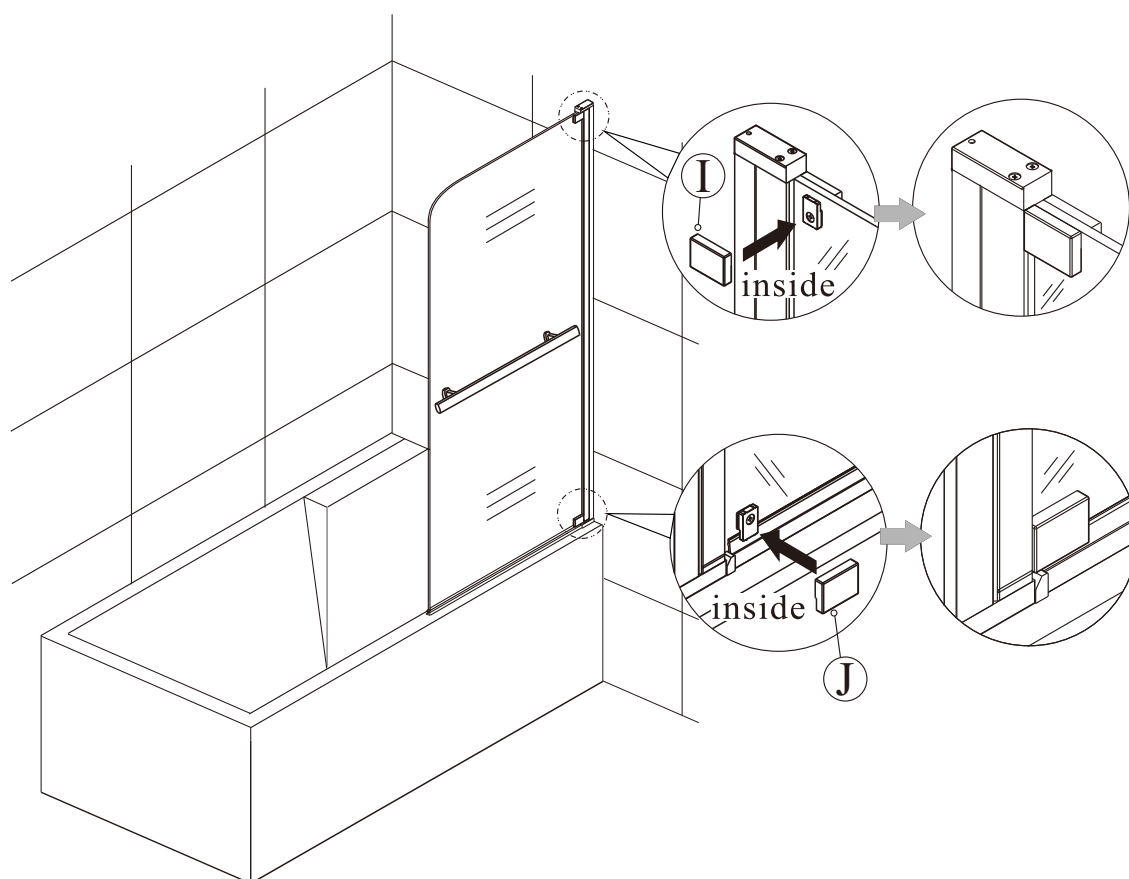

(6)

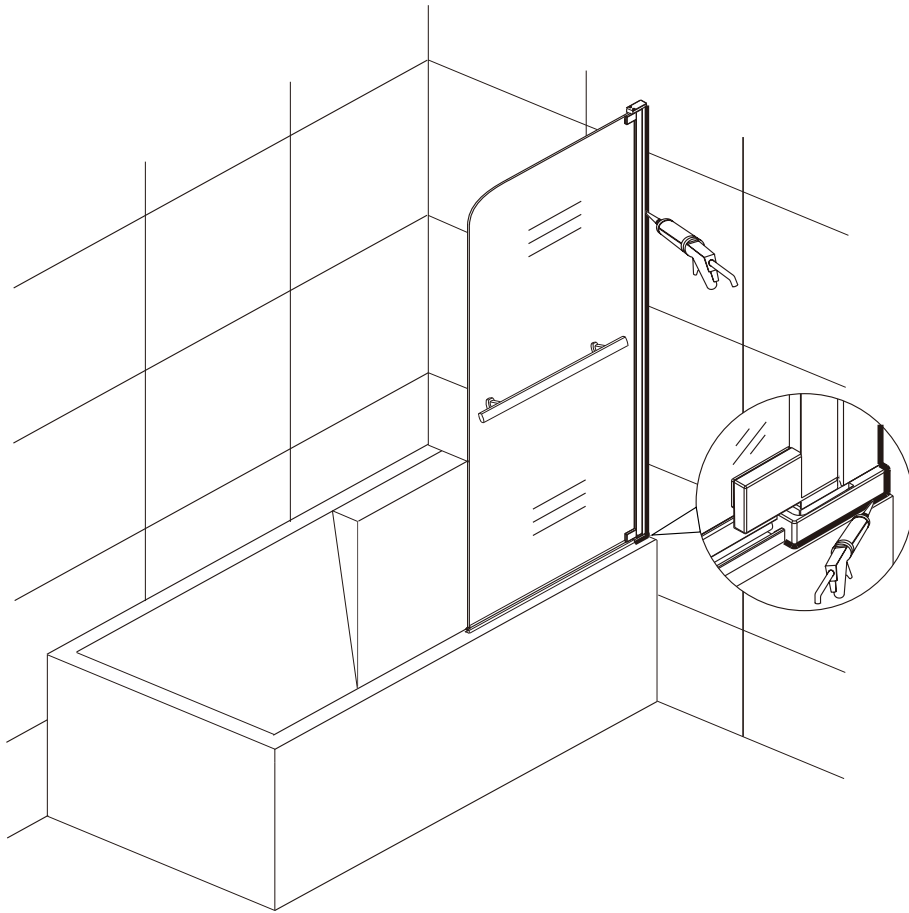

Apply some silicone on the outside edge of the shower enclosure (between the wall profiles and wall and between the frame and the tray) to enhance waterproof. After installation, it needs 24hours for silicone to dry before being put into use.

Cleaning & Maintenance

Clean the sundries regularly to prevent the drain from being jammed. Usually, clean the shower enclosure by mop with mild detergent.

Don't clean the shower enclosure with irritant detergent, such as alcohol, gasoline or other chemical cleaner.

Should there be any dirty stains on the shower enclosure, you may clean it by calico with toothpaste, but you need to clean it with water afterwards.

After the installation is completed, if you find there is much noise when the glass door moves, you may add small quantity of lubricant onto the roller wheel, slipping hook and the track.